




oventrop

Innovation + Quality

Pressure Independent Control Valves

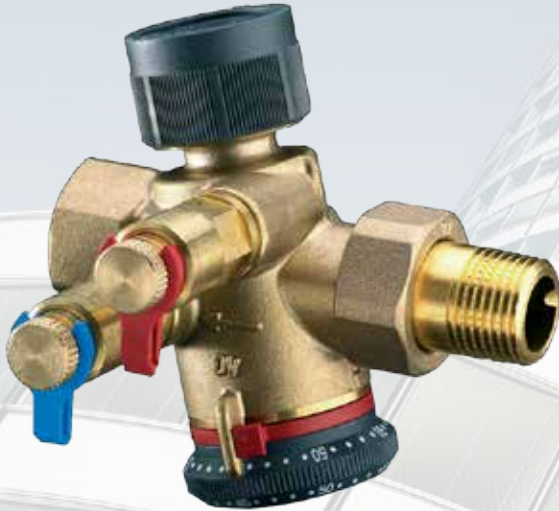

Scan for
submittals



“Cocon QTZ”

- Pressure independent control valve
- Adjustable balancing set point
- Multiple flow rates from one valve
- Designed for control from 5 - 60 psid
- Pressure test points for flow verification
- Linear control valve characteristic
- Flow rate handwheel marked in GPM
- Close-off pressure of 232 psi
- Dezincification resistant brass body

Dynamic Balancing Valves



Dynamic Balancing Valve

- Limits flow to set rate
- Designed for control from 2 - 60 psid
- Integrated ball valve for positive shutoff
- Pressure test points for flow verification
- Removable cartridge for system flushing
- Brass body

Static Balancing Valves



“Hydrocontrol R”

- Calibrated balancing valve
- Bronze body
- Dezincification resistant brass trim
- Precision hydronic balancing
- Multi-turn, lockable handwheel
- Y-pattern globe style valve body
- Pressure test points for flow measurement



“Hydrocontrol CS”

- Low lead compliant
- Basic hydronic balancing
- Ball valve design
- Positive shutoff
- Pressure test points for flow measurement



“Cocon QFC”

- Pressure independent control valve
- Adjustable balancing set point
- Multiple flow rates from one valve
- Designed for control from 5 - 60 psid
- Pressure test points for flow verification
- Linear control valve characteristic
- Flow rate handwheel marked in GPM
- Close-off pressure of 232 psi
- Cast iron body
- Dezincification resistant brass and bronze trim



Dynamic Balancing Valve


- Limits flow to set rate
- Designed for control from 2 - 60 psid
- Optional butterfly valve for positive shutoff
- Pressure test points for flow verification
- Cast iron body
- Wafer style valve
- Lifting lug for easy installation



“Hydrocontrol F”


- Calibrated balancing valve
- Cast iron body
- Dezincification resistant brass and bronze trim
- Precision hydronic balancing
- Multi-turn, lockable handwheel
- Y-pattern globe style valve body
- Pressure test points for flow measurement

Coil Kit Components

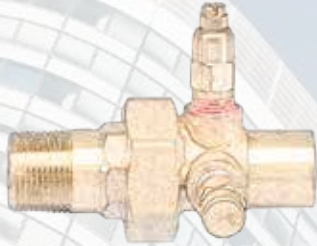

Accessory Union

- PT port
- Manual air vent
- Reducing tailpieces
- Available from ½" to 2"

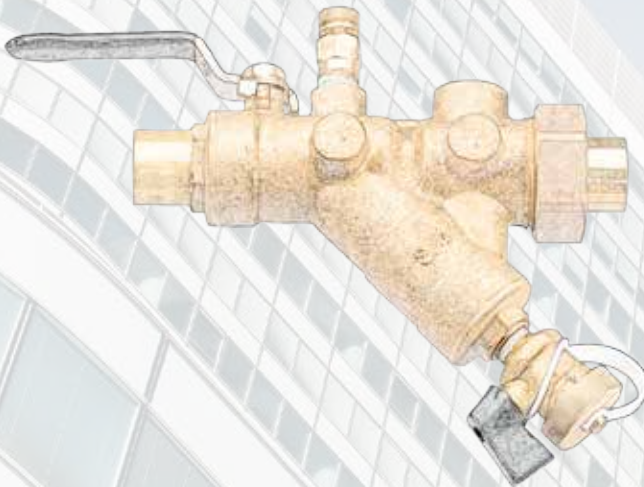


Y-strainer ball valve


- 20-mesh strainer screen
- PT port
- Shut off ball valve
- Bypass port
- Drain valve
- Reducing tailpieces
- Available from ½" to 2"

Coil kits

Two-way kit with "Hydrocontrol R" balancing valve and Y-strainer ball valve

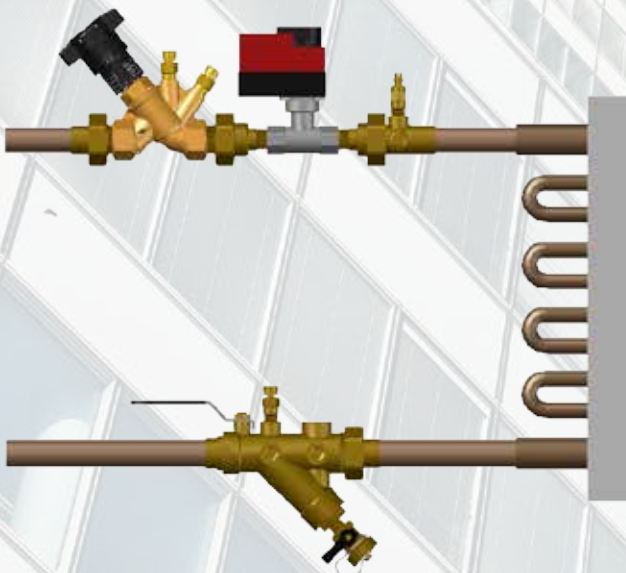

Two-way kit with dynamic balancing valve and Y-strainer ball valve

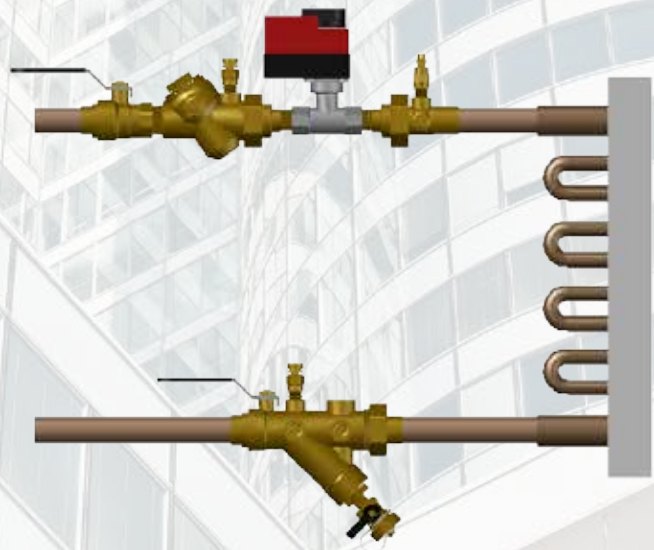

Oventrop Corporation

PO Box 789, 29 Kripes Road, East Granby, CT 06026 - Ph: 860.413.9173 - Fax: 860-413-9436

www.oventrop-us.com