


FIRE PROTECTION & WATERWORKS HANGERS

A 3033 Top Beam Clamp - Wide Mouth

Material: Malleable iron casting with a hardened steel set screw

Application: Designed for attaching a hanger rod to the top or bottom flange of a bar joist or other structural shapes where the thickness of the flange does not exceed 1"

Ordering: Specify figure number, and rod size.

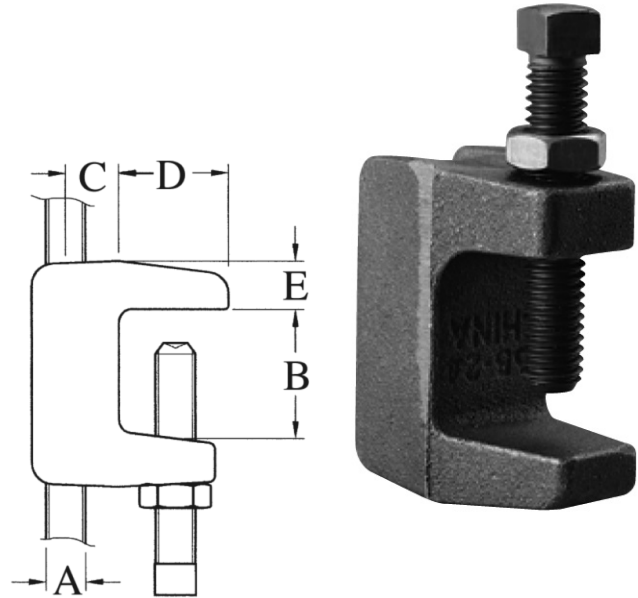

* cUL approved 3/8" rod - 1/2" thru 4" pipe size and 1/2" rod - 5" thru 8" pipe size only

* FM approved 3/8" rod - 3/4" thru 4" pipe size only

A 3033 TOP BEAM CLAMP - WIDE MOUTH

"A"		"B"		"C"		"D"		"E"		Max Rec Loads	Box Qty
in	mm	in	mm	in	mm	in	mm	in	mm		
3/8	10	1-1/8	28.6	1/2	12.5	1	25.4	7/16	11.1	950	60
1/2	12	1-1/8	28.6	1/2	12.5	1	25.4	7/16	11.1	950	55

Approvals: Underwriters' Laboratory Listed and FM Approved products are manufactured by Jinan Meide. Conforms with Manufacturers Standardization Society ANSI/MSS-SP-58 (Type 19 & 23), Install in accordance with ANSI/MSS-SP-69. Exceeds requirements of NFPA-13.

